

# **Generator Interconnection**

## **Facilities Study Report**

**Revision 1**

**Lenoir County, NC**  
**37.8 MW Solar Farm**  
**Queue #372**



**April 17, 2017**  
**Duke Energy Progress**  
**Transmission Department**

## Table of Contents

1	PURPOSE.....	3
2	ASSUMPTIONS.....	3
3	RESULTS.....	4
3.1	Power-flow Analysis Results .....	4
3.2	Stability Analysis Results .....	4
3.3	Power Factor Requirements .....	4
3.4	Short Circuit Analysis Results .....	5
3.5	Harmonics Assessment .....	5
3.6	Interconnection of Customer's Generation .....	5
3.7	Estimate of Interconnection Cost .....	6
4	SUMMARY.....	7
	APPENDIX I : FIGURES.....	8

## 1 PURPOSE

The purpose of this Facilities study is to assess the impacts of the generator interconnection requests on the reliability of the Duke Energy Progress (DEP) transmission system with respect to power flow, power factor, stability, and short circuit. Estimates of the cost and time required to interconnect the generation as well as to resolve the impacts as determined in this analysis are also included. The DEP internal system analysis consists of an evaluation of the internal DEP transmission system utilizing documented transmission planning criteria. The requests are described in Table 1 below.

**Table 1: Interconnection Requests**

DEP Generator Interconnection Queue No.	MW	Requested In-Service Date	County	Interconnection Facility
372	37.8	12/30/2017	Lenoir County, NC	Goldsboro – Wommack 115 kV Line

## 2 ASSUMPTIONS

The following Facilities Study results are from the DEP internal power-flow and dynamic models that reflect specific conditions of the DEP system at points in time consistent with the generator interconnection requests being evaluated. The cases include the most recent information for load, generation, transmission, interchange, and other pertinent data necessary for analysis. Future years may include transmission, generation, and interchange modifications that are not budgeted and for which no firm commitments have been made. Further, DEP retains the right to make modifications to modeling cases as needed if additional information is available or if specific scenarios necessitate changes. For the systems surrounding DEP, data is based on the ERAG MMWG model. The suitability of the model for use by others is the sole responsibility of the user. Prior queued generator interconnection requests were considered in this analysis.

The results of this analysis are based on Interconnection Customer's queue requests including generation equipment data provided. If the facility technical data or interconnection points to the transmission system change, the results of this analysis may need to be reevaluated.

This study was based on the following assumptions:

- CUSTOMER would construct, own and operate the electrical infrastructure that would connect their generation to DEP's facilities, including any step up transformers and lines from the generators, but excluding the circuit breaker in the new breaker station where applicable.

## 3 RESULTS

### 3.1 Power-flow Analysis Results

Facilities that may require upgrade within the first three to five years following the in-service date are identified. Based on projected load growth on the DEP transmission system, facilities of concern are those with post-contingency loadings of 95% or greater of their thermal rating and low voltage of 92% and below, for the requested in-service year or the in-service year of a higher queued request. The identification of these facilities is crucial due to the construction lead times necessary for certain system upgrades. This process will ensure that appropriate focus is given to these problem areas to investigate whether construction of upgrade projects is achievable to accommodate the requested interconnection service.

All queue requests, as well as nearby existing and prior-queued generation, were modeled and assumed to be operating at full output.

Contingency analysis study results show that interconnection of these generation facilities result in **NO** potential thermal or voltage issues on the DEP system.

### 3.2 Stability Analysis Results

A stability analysis was performed to determine the impact of the proposed generation additions on the DEP transmission system and other nearby generation. All queue requests, as well as nearby existing and prior-queued generation, were modeled and assumed to be operating at full output. The proposed solar farm was modeled considering the specific layout and number of inverters (9 GE LV5-1540-SLR, 37.8 MVA). The model included a single lumped equivalent generator (to represent the inverters) with inverter transformer (6.0%Z at 4000/4200 kVA x 9) and collector impedance. The interconnection to the DEP transmission system was via a single substation transformer (8.5%Z at 23/30.7/38.3 MVA), based on data provided by the Customer.

A representative set of faults was simulated to determine if there would be any adverse impact to the transmission system as a result of the proposed generation. The ability of the solar farm to ride through the voltage depressions resulting from the faults was also verified, based on the model parameters provided by the Customer. The stability evaluation did **NOT** identify any stability related problems. All generators stayed on-line and stable for all simulated faults. If the Customer data changes from that provided, these results will need to be reevaluated.

### 3.3 Power Factor Requirements

DEP's Large Generator Interconnection Procedure (LGIP) requires the proposed generation to be capable of delivering the requested MW to the Point of Interconnection (POI) **at a 0.95 lagging power factor**. For analysis of the power factor requirement, the Customer-supplied data regarding inverter capabilities, collector field configuration, impedances and line charging, and transformer impedances were used. The results of the analysis indicate that the proposed solar plant design, without capacitors, **DOES NOT meet** the 0.95 lagging power factor

requirement at the POI for the requested MW delivery level. The customer has chosen the option to add a capacitor bank to help meet the power factor requirement. With a capacitor bank added to the design, Table 2 below summarizes the approved MW at the POI, along with the MVAR capability at the POI and the capacitor size required to meet the 0.95 lagging power factor requirement at the POI.

**Table 2: MW Approved and MVAR Capability Required at the POI and Minimum Capacitor Size Required to Meet Power Factor Requirements**

DEP Generator Interconnection Queue No.	MW Requested	MW Approved at POI	MVAR Capability Required at POI	Minimum Capacitor MVAR Required
372	37.8	35.5	11.7	6.1

### **3.4 Short Circuit Analysis Results**

A short circuit analysis was performed to assess the impact of the proposed generation addition on transmission system equipment capabilities. The analysis indicates that no short circuit equipment capabilities will be exceeded as result from the proposed generation additions and associated transmission upgrades.

The results of the short circuit study are based on Customer provided generation equipment data and location. Also, the prudent use of engineering assumptions and typical values for some data were used. If the units' technical data or interconnection points to the transmission system changes, the results of this analysis may need to be reevaluated.

### **3.5 Harmonics Assessment**

There is potential interaction of harmonic current injections from the Customer's proposed generation and certain capacitor banks on the DEP system. Testing may be necessary after the actual in-service date of this generation and the Customer will be responsible for mitigation of any detrimental impacts to the system.

### **3.6 Interconnection of Customer's Generation**

The point of interconnection for Queue #372 is a new 115 kV breaker station connected to the Goldsboro – Wommack 115 kV Line near structure 224. The breaker station one-line is provided as Figure 1. The customer should verify that the MVA ratings of their connecting lines are sufficient to accommodate delivering the total MVA output to the point of interconnection at the required 0.95 power factor.

### **3.7 Estimate of Interconnection Cost**

#### **Q372**

The estimate includes the assumption that DEP will acquire and use a portion of the property that the Customer will secure for the addition of the facility.

##### Tap Line

*Description:* DEP will tap the Goldsboro – Wommack 115 kV Line and Construct a short tap line to New Breaker Station adjacent to DEP ROW. Manual switches will be installed on each side of the Tap.

*Estimated Cost:* \$850,000

##### New Breaker Station

*Description:* Construct new 1-115 kV breaker station at generation new connection point. Assumes a control building with cable trench, line trap, CCVTs, surge arrestors, power pot, 115 kV breaker with air break switches, metering PTs and CTs.

*Estimated Cost:* \$2,140,000

##### Install Transfer Trip Scheme at New Breaker Station and Transmission Substations

*Description:* It will be necessary to separate this generation facility from the DEP system for faults on the Goldsboro – Wommack 115 kV Line. Install protection system and transfer trip for coordination between the above listed transmission line and proposed generation facility.

*Estimated Cost:* \$260,000

##### Taxes

*Description:* NC utility tax of 7%

*Estimated Cost:* \$227,500

**Total Interconnection Cost Estimate:** **\$3,477,500**

## 4 SUMMARY

This Generator Interconnection Facilities Study assesses the impact of interconnecting a new generation facility with a requested rating of 37.8 MW. Based on the data provided by the requester, the approved MW injection is 35.5 MW with a 6.1 Mvar capacitor bank. Power flow, stability, and short circuit analyses found no issues. Interconnection upgrades to the DEP Transmission System are necessary to accommodate Q372.

DEP may be able to meet the requested schedule for interconnection of this request if a firm written agreement to proceed is obtained from the customer at least 12 months prior to the in-service date.

The additional cost for telecommunications and metering can be estimated as a monthly charge of \$3,000/month per interconnection.


Power-flow	\$0
Stability	\$0
Short Circuit	\$0
<u>Interconnection</u>	<u>\$3,477,500</u>
Total Estimate	\$3,477,500

Study Completed by: Bill Quaintance  
Bill Quaintance, PE, Duke Energy Progress

Reviewed by: John O'Connor  
John O'Connor, PE, Duke Energy Progress

## **APPENDIX I : FIGURES**

-Figure 1-

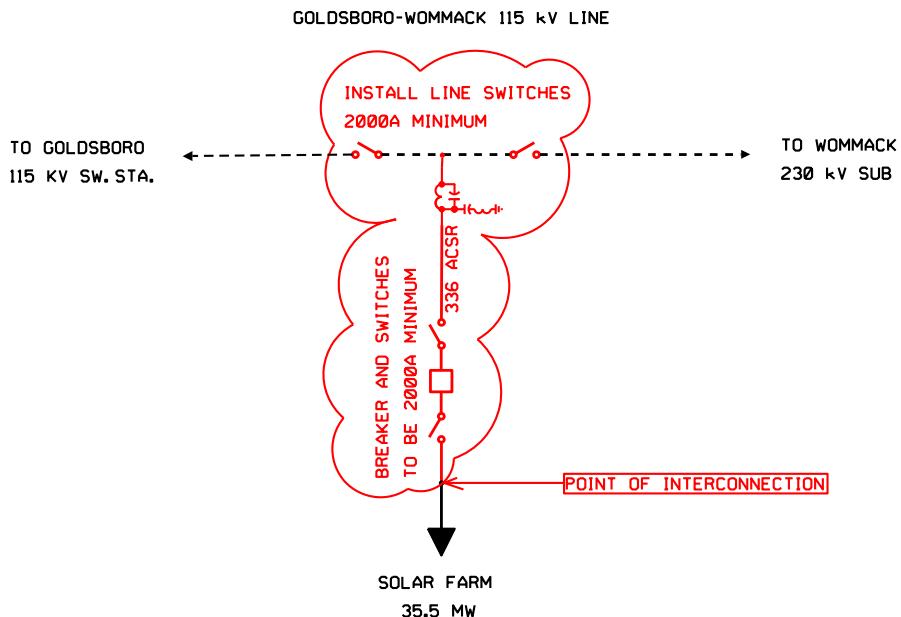

INSTALL 115 KV CIRCUIT BREAKER AND ASSOCIATED EQUIPMENT  
INCLUDING PROTECTION SYSTEM AND TRANSFER TRIP FOR COORDINATION  
WITH GOLDSBORO-WOMMACK 115 KV LINE AND  
INTERCONNECT THE FACILITY.

REV. 12/09/16

	TARGET DATE: TBD	Q#372 LENOIR COUNTY SOLAR GENERATION	
	KAH	1 OF 1	